



## POLE SPECIFICATIONS

**MATERIAL:**  
Round Non-Tapered (RE) &  
Fluted Non-Tapered (FE)  
Aluminum

Round Tapered (RF) &  
Fluted Tapered (FF)  
Aluminum


**ALLOY:**  
6061-T6 (RE, FE)  
5052-H32 (RF, FF)

**POLE HEIGHT:**  
10' - 18'


**FINISH:**  
Available in textured or  
smooth.

**OPTIONS:**  
GFI - Ground Fault Receptacle  
BA - Banner Arms  
FPH - Flower Pot Holder  
FH - Flag Holder


### CROSS SECTION:




Round Non-Tapered  
(RE)



Round Tapered  
(RF)




Fluted Non-Tapered  
(FE)




Fluted Tapered  
(FF)

## DECORATIVE BASE DETAILS

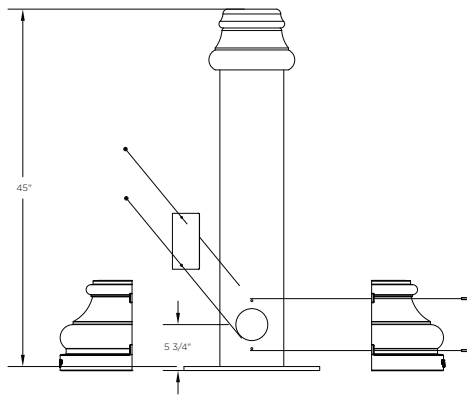

## BASEPLATE DETAILS

Baseplate		Bolt Circle		Anchor Bolts	
Circle (in)	Thickness (in)	Dia (in)	+/- (in)	Dia x Length x Hook (in)	Projection (in)
17	0.5	12.5	0	0.75 x 27 x 3.75	3

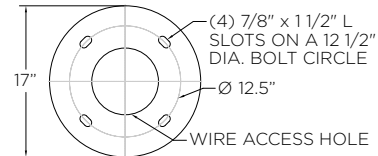

## HOW TO ORDER

**SHAFT STYLE**  
RE - Round Non-Tapered  
RF - Round Tapered  
FE - Fluted Non-Tapered  
FF - Fluted Tapered

**HEIGHT**  
10, 11, 12, 13, 14, 15, 16, 17, 18

**COMPLETE WITH**  
To be supplied by King Luminaire

**PAINT COLOR**  
GN - Federal Green, BE - Blue, GY - Gray, BN - Brown, BK - Black, BZ - Bronze  
\*Additional options available on website

**DECORATIVE BASE**  
KM90 - Canterbury Jr.

**MATERIAL**  
A - Aluminum


**BUTT DIAMETER**  
5.25 (FE)  
5.5 (RF, FF & 10'-13')  
5.56 (RE)  
6.25 (RF, FF & 14'-16')  
6.75 (RF, FF & 17'-18')

**WALL THICKNESS**  
0.091 (RF & 10'-18' OR FF & 10'-17')  
0.144 (RF, FF)  
0.182 (RF, FF)  
0.229 (FF & 10'-16')  
0.25 (FE)  
0.258 (RE)

**TENON (POST TOP)**  
140 35/35  
140 30/30

**OPTIONS**  
GFI - Ground Fault Receptacle  
BA - Banner Arms  
FPH - Flower Pot Holder  
FH - Flag Holder

Ordering format: **KM90** - **SHAFT STYLE** - **HEIGHT** - **MATERIAL** - **BUTT DIAMETER** - **WALL THICKNESS** - **C/W** - **TENON (POST TOP)** - **OPTIONS** - **PAINT COLOR**

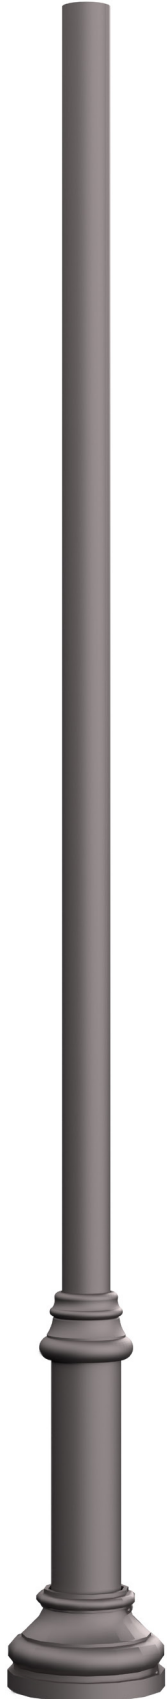

# POLE DETAILS

KM90 THE CANTERBURY JR.

RE ALUMINUM // Pole Details

Nominal Mounting Height (ft)	Catalog Code	Alloy	Butt (in)	Tip (in)	Wall Thickness (in)	Handhole	Wt. (lbs) *
10	KM90-RE-A-10-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	89.0
11	KM90-RE-A-11-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	94.0
12	KM90-RE-A-12-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	99.0
13	KM90-RE-A-13-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	105.0
14	KM90-RE-A-14-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	110.0
15	KM90-RE-A-15-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	115.0
16	KM90-RE-A-16-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	120.0
17	KM90-RE-A-17-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	125.0
18	KM90-RE-A-18-5.56-0.258	6061-T6	5.56	5.56	0.258	4" DIA. Hole (5 3/4" AG)	130.0

RF ALUMINUM // Pole Details

10	KM90-RF-A-10-5.5-0.091	5052-H32	5.5	4.57	0.091	4" DIA. Hole (5 3/4" AG)	66.0
	KM90-RF-A-10-5.5-0.144	5052-H32	5.5	4.57	0.144	4" DIA. Hole (5 3/4" AG)	72.0
	KM90-RF-A-10-5.5-0.182	5052-H32	5.5	4.57	0.182	4" DIA. Hole (5 3/4" AG)	77.0
11	KM90-RF-A-11-5.5-0.091	5052-H32	5.5	4.43	0.091	4" DIA. Hole (5 3/4" AG)	68.0
	KM90-RF-A-11-5.5-0.144	5052-H32	5.5	4.43	0.144	4" DIA. Hole (5 3/4" AG)	75.0
	KM90-RF-A-11-5.5-0.182	5052-H32	5.5	4.43	0.182	4" DIA. Hole (5 3/4" AG)	80.0
12	KM90-RF-A-12-5.5-0.091	5052-H32	5.5	4.29	0.091	4" DIA. Hole (5 3/4" AG)	69.0
	KM90-RF-A-12-5.5-0.144	5052-H32	5.5	4.29	0.144	4" DIA. Hole (5 3/4" AG)	77.0
	KM90-RF-A-12-5.5-0.182	5052-H32	5.5	4.29	0.182	4" DIA. Hole (5 3/4" AG)	83.0
13	KM90-RF-A-13-5.5-0.091	5052-H32	5.5	4.15	0.091	4" DIA. Hole (5 3/4" AG)	70.0
	KM90-RF-A-13-5.5-0.144	5052-H32	5.5	4.15	0.144	4" DIA. Hole (5 3/4" AG)	79.0
	KM90-RF-A-13-5.5-0.182	5052-H32	5.5	4.15	0.182	4" DIA. Hole (5 3/4" AG)	85.0
14	KM90-RF-A-14-6.25-0.091	5052-H32	6.25	4.76	0.091	4" DIA. Hole (5 3/4" AG)	75.0
	KM90-RF-A-14-6.25-0.144	5052-H32	6.25	4.76	0.144	4" DIA. Hole (5 3/4" AG)	86.0
	KM90-RF-A-14-6.25-0.182	5052-H32	6.25	4.76	0.182	4" DIA. Hole (5 3/4" AG)	94.0
15	KM90-RF-A-15-6.25-0.091	5052-H32	6.25	4.62	0.091	4" DIA. Hole (5 3/4" AG)	76.0
	KM90-RF-A-15-6.25-0.144	5052-H32	6.25	4.62	0.144	4" DIA. Hole (5 3/4" AG)	88.0
	KM90-RF-A-15-6.25-0.182	5052-H32	6.25	4.62	0.182	4" DIA. Hole (5 3/4" AG)	97.0
16	KM90-RF-A-16-6.25-0.091	5052-H32	6.25	4.48	0.091	4" DIA. Hole (5 3/4" AG)	78.0
	KM90-RF-A-16-6.25-0.144	5052-H32	6.25	4.48	0.144	4" DIA. Hole (5 3/4" AG)	91.0
	KM90-RF-A-16-6.25-0.182	5052-H32	6.25	4.48	0.182	4" DIA. Hole (5 3/4" AG)	100.0
17	KM90-RF-A-17-6.75-0.091	5052-H32	6.75	4.84	0.091	4" DIA. Hole (5 3/4" AG)	81.0
	KM90-RF-A-17-6.75-0.144	5052-H32	6.75	4.84	0.144	4" DIA. Hole (5 3/4" AG)	97.0
	KM90-RF-A-17-6.75-0.182	5052-H32	6.75	4.84	0.182	4" DIA. Hole (5 3/4" AG)	107.0
18	KM90-RF-A-18-6.75-0.091	5052-H32	6.75	4.70	0.091	4" DIA. Hole (5 3/4" AG)	83.0
	KM90-RF-A-18-6.75-0.144	5052-H32	6.75	4.70	0.144	4" DIA. Hole (5 3/4" AG)	99.0
	KM90-RF-A-18-6.75-0.182	5052-H32	6.75	4.70	0.182	4" DIA. Hole (5 3/4" AG)	110.0

FE ALUMINUM // Pole Details

10	KM90-FE-A-10-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	88.0
11	KM90-FE-A-11-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	93.0
12	KM90-FE-A-12-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	98.0
13	KM90-FE-A-13-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	103.0
14	KM90-FE-A-14-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	108.0
15	KM90-FE-A-15-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	113.0
16	KM90-FE-A-16-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	118.0
17	KM90-FE-A-17-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	123.0
18	KM90-FE-A-18-5.25-0.25	6061-T6	5.25	5.25	0.25	4" DIA. Hole (5 3/4" AG)	127.0

\* Weight includes the pole shaft, baseplate, and decorative cover.

FF ALUMINUM // Pole Details

Nominal Mounting Height (ft)	Catalog Code	Alloy	Butt (in)	Tip (in)	Wall Thickness (in)	Handhole	Wt. (lbs) *
10	KM90-FF-A-10-5.5-0.091	5052-H32	5.5	4.57	0.091	4" DIA. Hole (5 3/4" AG)	65.0
	KM90-FF-A-10-5.5-0.144	5052-H32	5.5	4.57	0.144	4" DIA. Hole (5 3/4" AG)	71.0
	KM90-FF-A-10-5.5-0.182	5052-H32	5.5	4.57	0.182	4" DIA. Hole (5 3/4" AG)	76.0
	KM90-FF-A-10-5.5-0.229	5052-H32	5.5	4.57	0.229	4" DIA. Hole (5 3/4" AG)	81.0
11	KM90-FF-A-11-5.5-0.091	5052-H32	5.5	4.43	0.091	4" DIA. Hole (5 3/4" AG)	67.0
	KM90-FF-A-11-5.5-0.144	5052-H32	5.5	4.43	0.144	4" DIA. Hole (5 3/4" AG)	74.0
	KM90-FF-A-11-5.5-0.182	5052-H32	5.5	4.43	0.182	4" DIA. Hole (5 3/4" AG)	78.0
	KM90-FF-A-11-5.5-0.229	5052-H32	5.5	4.43	0.229	4" DIA. Hole (5 3/4" AG)	84.0
12	KM90-FF-A-12-5.5-0.091	5052-H32	5.5	4.29	0.091	4" DIA. Hole (5 3/4" AG)	68.0
	KM90-FF-A-12-5.5-0.144	5052-H32	5.5	4.29	0.144	4" DIA. Hole (5 3/4" AG)	76.0
	KM90-FF-A-12-5.5-0.182	5052-H32	5.5	4.29	0.182	4" DIA. Hole (5 3/4" AG)	81.0
	KM90-FF-A-12-5.5-0.229	5052-H32	5.5	4.29	0.229	4" DIA. Hole (5 3/4" AG)	88.0
13	KM90-FF-A-13-5.5-0.091	5052-H32	5.5	4.15	0.091	4" DIA. Hole (5 3/4" AG)	69.0
	KM90-FF-A-13-5.5-0.144	5052-H32	5.5	4.15	0.144	4" DIA. Hole (5 3/4" AG)	78.0
	KM90-FF-A-13-5.5-0.182	5052-H32	5.5	4.15	0.182	4" DIA. Hole (5 3/4" AG)	84.0
	KM90-FF-A-13-5.5-0.229	5052-H32	5.5	4.15	0.229	4" DIA. Hole (5 3/4" AG)	91.0
14	KM90-FF-A-14-6.25-0.091	5052-H32	6.25	4.76	0.091	4" DIA. Hole (5 3/4" AG)	73.0
	KM90-FF-A-14-6.25-0.144	5052-H32	6.25	4.76	0.144	4" DIA. Hole (5 3/4" AG)	84.0
	KM90-FF-A-14-6.25-0.182	5052-H32	6.25	4.76	0.182	4" DIA. Hole (5 3/4" AG)	91.0
	KM90-FF-A-14-6.25-0.229	5052-H32	6.25	4.76	0.229	4" DIA. Hole (5 3/4" AG)	100.0
15	KM90-FF-A-15-6.25-0.091	5052-H32	6.25	4.62	0.091	4" DIA. Hole (5 3/4" AG)	75.0
	KM90-FF-A-15-6.25-0.144	5052-H32	6.25	4.62	0.144	4" DIA. Hole (5 3/4" AG)	86.0
	KM90-FF-A-15-6.25-0.182	5052-H32	6.25	4.62	0.182	4" DIA. Hole (5 3/4" AG)	94.0
	KM90-FF-A-15-6.25-0.229	5052-H32	6.25	4.62	0.229	4" DIA. Hole (5 3/4" AG)	104.0
16	KM90-FF-A-16-6.25-0.091	5052-H32	6.25	4.48	0.091	4" DIA. Hole (5 3/4" AG)	76.0
	KM90-FF-A-16-6.25-0.144	5052-H32	6.25	4.48	0.144	4" DIA. Hole (5 3/4" AG)	89.0
	KM90-FF-A-16-6.25-0.182	5052-H32	6.25	4.48	0.182	4" DIA. Hole (5 3/4" AG)	97.0
	KM90-FF-A-16-6.25-0.229	5052-H32	6.25	4.48	0.229	4" DIA. Hole (5 3/4" AG)	108.0
17	KM90-FF-A-17-6.75-0.091	5052-H32	6.75	4.84	0.091	4" DIA. Hole (5 3/4" AG)	80.0
	KM90-FF-A-17-6.75-0.144	5052-H32	6.75	4.84	0.144	4" DIA. Hole (5 3/4" AG)	94.0
	KM90-FF-A-17-6.75-0.182	5052-H32	6.75	4.84	0.182	4" DIA. Hole (5 3/4" AG)	104.0
18	KM90-FF-A-18-6.75-0.144	5052-H32	6.75	4.70	0.144	4" DIA. Hole (5 3/4" AG)	97.0
	KM90-FF-A-18-6.75-0.182	5052-H32	6.75	4.70	0.182	4" DIA. Hole (5 3/4" AG)	107.0

\* Weight includes the pole shaft, baseplate, and decorative cover.

## SHAFT LOADING

RE ALUMINUM // Loading

Nominal Mounting Height (ft)	Catalog Code	Design Information // AASHTO LTS-6, Latest Revision **									
		90 MPH		100 MPH		110 MPH		120 MPH		150 MPH	
		Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)
10	KM90-RE-A-10-5.56-0.258	19.6	300	15.8	300	13.0	200	10.8	300	6.8	200
11	KM90-RE-A-11-5.56-0.258	16.5	300	13.3	200	10.9	300	9.1	200	5.7	200
12	KM90-RE-A-12-5.56-0.258	14.2	300	11.4	300	9.3	200	7.7	200	4.8	200
13	KM90-RE-A-13-5.56-0.258	12.2	300	9.8	200	8.0	200	6.6	200	4.0	200
14	KM90-RE-A-14-5.56-0.258	10.6	300	8.5	200	6.9	200	5.7	200	3.4	200
15	KM90-RE-A-15-5.56-0.258	9.3	200	7.4	200	5.9	200	4.9	200	2.9	200
16	KM90-RE-A-16-5.56-0.258	8.1	200	6.4	200	5.1	200	4.2	200	2.4	200
17	KM90-RE-A-17-5.56-0.258	6.9	200	5.4	200	4.3	200	3.5	200	2.0	200
18	KM90-RE-A-18-5.56-0.258	5.9	200	4.6	200	3.6	200	2.9	200	1.6	200

Nominal Mounting Height (ft)	Catalog Code	Design Information // AASHTO LTS-6, Latest Revision **										
		90 MPH		100 MPH		110 MPH		120 MPH		150 MPH		
		Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	
RF ALUMINUM // Loading	10	KM90-RF-A-10-5.5-0.091	9.3	200	7.3	200	6.0	200	4.9	200	3.0	200
		KM90-RF-A-10-5.5-0.144	15.1	300	12.0	200	9.9	200	8.3	200	5.2	200
		KM90-RF-A-10-5.5-0.182	19.2	300	15.3	300	12.6	200	10.5	300	6.6	200
	11	KM90-RF-A-11-5.5-0.091	7.7	200	6.0	200	4.8	200	4.0	200	2.4	200
		KM90-RF-A-11-5.5-0.144	12.8	300	10.1	300	8.3	200	6.9	200	4.3	200
		KM90-RF-A-11-5.5-0.182	16.2	300	12.9	300	10.5	300	8.8	200	5.5	200
	12	KM90-RF-A-12-5.5-0.091	6.4	200	4.9	200	3.9	200	3.2	200	1.9	200
		KM90-RF-A-12-5.5-0.144	10.9	300	8.6	200	7.0	200	5.8	200	3.5	200
		KM90-RF-A-12-5.5-0.182	13.9	300	11.0	300	9.0	200	7.5	200	4.6	200
	13	KM90-RF-A-13-5.5-0.091	5.4	200	4.0	200	3.1	200	2.5	200	1.4	200
		KM90-RF-A-13-5.5-0.144	9.5	200	7.4	200	5.9	200	4.8	200	2.9	200
		KM90-RF-A-13-5.5-0.182	12.1	300	9.5	200	7.7	200	6.3	200	3.8	200
	14	KM90-RF-A-14-6.25-0.091	6.3	200	4.9	200	3.9	200	3.1	200	1.8	200
		KM90-RF-A-14-6.25-0.144	11.0	300	8.8	200	7.2	200	5.9	200	3.6	200
		KM90-RF-A-14-6.25-0.182	14.0	300	11.1	300	9.1	200	7.5	200	4.6	200
	15	KM90-RF-A-15-6.25-0.091	5.3	200	4.0	200	3.2	200	2.5	200	1.4	200
		KM90-RF-A-15-6.25-0.144	9.8	200	7.6	200	6.2	200	5.1	200	3.0	200
		KM90-RF-A-15-6.25-0.182	12.3	300	9.8	200	7.9	200	6.5	200	4.0	200
	16	KM90-RF-A-16-6.25-0.091	4.4	200	3.3	200	2.5	200	2.0	200	1.0	200
		KM90-RF-A-16-6.25-0.144	8.6	200	6.6	200	5.3	200	4.3	200	2.5	200
		KM90-RF-A-16-6.25-0.182	10.8	300	8.6	200	6.9	200	5.7	200	3.4	200
	17	KM90-RF-A-17-6.75-0.091	4.7	200	3.6	200	2.8	200	2.2	200	1.1	200
		KM90-RF-A-17-6.75-0.144	9.1	200	7.2	200	5.7	200	4.7	200	2.7	200
		KM90-RF-A-17-6.75-0.182	11.4	300	9.2	200	7.4	200	6.1	200	3.6	200
18	KM90-RF-A-18-6.75-0.091	3.9	200	2.8	200	2.2	200	1.7	200	0.8	200	
	KM90-RF-A-18-6.75-0.144	7.9	200	6.1	200	4.9	200	4.0	200	2.3	200	
	KM90-RF-A-18-6.75-0.182	10.0	300	8.0	200	6.4	200	5.2	200	3.1	200	
FE ALUMINUM // Loading	10	KM90-FE-A-10-5.25-0.25	17.1	300	13.5	300	10.9	300	8.9	200	5.0	200
	11	KM90-FE-A-11-5.25-0.25	14.3	300	11.2	300	9.0	200	7.2	200	3.9	200
	12	KM90-FE-A-12-5.25-0.25	12.1	300	9.5	200	7.4	200	5.9	200	2.9	200
	13	KM90-FE-A-13-5.25-0.25	10.4	300	8.0	200	6.1	200	4.7	200	2.1	200
	14	KM90-FE-A-14-5.25-0.25	9.0	200	6.7	200	5.1	200	3.8	200	1.4	200
	15	KM90-FE-A-15-5.25-0.25	7.7	200	5.6	200	4.1	200	3.0	200	0.8	200
	16	KM90-FE-A-16-5.25-0.25	6.6	200	4.7	200	3.3	200	2.2	200	-	-
	17	KM90-FE-A-17-5.25-0.25	5.5	200	3.8	200	2.5	200	1.5	200	-	-
	18	KM90-FE-A-18-5.25-0.25	4.5	200	2.9	200	1.8	200	0.9	200	-	-

FF ALUMINUM // Loading

Nominal Mounting Height (ft)	Catalog Code	Design Information // AASHTO LTS-6, Latest Revision **									
		90 MPH		100 MPH		110 MPH		120 MPH		150 MPH	
		Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)
10	KM90-FF-A-10-5.5-0.091	8.0	200	6.3	200	5.1	200	4.2	200	2.6	200
	KM90-FF-A-10-5.5-0.144	13.2	300	10.5	300	8.7	200	7.2	200	4.5	200
	KM90-FF-A-10-5.5-0.182	16.8	300	13.4	300	11.0	300	9.3	200	5.8	200
	KM90-FF-A-10-5.5-0.229	19.2	300	15.3	300	12.6	300	10.5	300	6.6	200
11	KM90-FF-A-11-5.5-0.091	6.6	200	5.1	200	4.1	200	3.3	200	2.0	200
	KM90-FF-A-11-5.5-0.144	11.1	300	8.8	200	7.2	200	6.0	200	3.6	200
	KM90-FF-A-11-5.5-0.182	14.2	300	11.2	300	9.3	200	7.7	200	4.8	200
	KM90-FF-A-11-5.5-0.229	16.2	300	12.9	300	10.5	300	8.8	200	5.5	200
12	KM90-FF-A-12-5.5-0.091	5.4	200	4.1	200	3.2	200	2.6	200	1.5	200
	KM90-FF-A-12-5.5-0.144	9.5	200	7.4	200	6.0	200	4.9	200	3.0	200
	KM90-FF-A-12-5.5-0.182	12.1	300	9.7	200	7.8	200	6.5	200	4.0	200
	KM90-FF-A-12-5.5-0.229	13.9	300	11.0	300	9.0	200	7.4	200	4.6	200
13	KM90-FF-A-13-5.5-0.091	4.5	200	3.3	200	2.5	200	2.0	200	1.1	200
	KM90-FF-A-13-5.5-0.144	8.2	200	6.3	200	5.0	200	4.1	200	2.4	200
	KM90-FF-A-13-5.5-0.182	10.5	300	8.3	200	6.6	200	5.5	200	3.3	200
	KM90-FF-A-13-5.5-0.229	12.2	300	9.6	200	7.7	200	6.4	200	3.9	200
14	KM90-FF-A-14-6.25-0.091	5.3	200	4.0	200	3.2	200	2.6	200	1.4	200
	KM90-FF-A-14-6.25-0.144	9.7	200	7.6	200	6.2	200	5.1	200	3.0	200
	KM90-FF-A-14-6.25-0.182	12.5	300	9.9	200	8.2	200	6.8	200	4.1	200
	KM90-FF-A-14-6.25-0.229	13.4	300	10.6	300	8.7	200	7.1	200	4.3	200
15	KM90-FF-A-15-6.25-0.091	4.4	200	3.3	200	2.5	200	2.0	200	1.1	200
	KM90-FF-A-15-6.25-0.144	8.4	200	6.5	200	5.3	200	4.3	200	2.5	200
	KM90-FF-A-15-6.25-0.182	11.0	300	8.8	200	7.1	200	5.8	200	3.5	200
	KM90-FF-A-15-6.25-0.229	12.0	300	9.5	200	7.7	200	6.3	200	3.7	200
16	KM90-FF-A-16-6.25-0.091	3.6	200	2.6	200	2.0	200	1.5	200	0.7	200
	KM90-FF-A-16-6.25-0.144	7.3	200	5.6	200	4.5	200	3.6	200	2.1	200
	KM90-FF-A-16-6.25-0.182	9.9	200	7.6	200	6.1	200	5.0	200	3.0	200
	KM90-FF-A-16-6.25-0.229	10.7	300	8.4	200	6.8	200	5.5	200	3.2	200
17	KM90-FF-A-17-6.75-0.091	3.8	200	2.8	200	2.2	200	1.7	200	0.8	200
	KM90-FF-A-17-6.75-0.144	7.8	200	6.1	200	4.9	200	4.0	200	2.3	200
	KM90-FF-A-17-6.75-0.182	9.6	200	7.5	200	6.0	200	4.8	200	2.8	200
18	KM90-FF-A-18-6.75-0.144	6.8	200	5.2	200	4.1	200	3.3	200	1.8	200
	KM90-FF-A-18-6.75-0.182	8.5	200	6.5	200	5.2	200	4.2	200	2.3	200

\*\* EPA represents the Effective Projected Area of the attachments on the pole. Designs are limited to post top luminaires or attachments located at or below the mounting height. Consult factory for poles supporting attachments located above the mounting height.